Grounding Busbar – SEB-10 (545030)



Proper bonding is essential to create an equipotential plane between service grounds and equipment during fault and transient conditions. This equipotential plane provides a near-zero voltage differential, and serves to protect people and equipment during these events. The grounding busbar is the most popular bonding product in use today.

- Provides a convenient, single-point grounding and bonding location
- Conductors are welded to the bar using a ERICO CADWELD exothermic connection or are mechanically fastened by using lugs
- Custom bars can be designed and manufacturerd to customer specifications

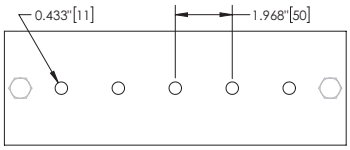

Part Number	SEB-10
Article Number	545030
Material	Copper
Busbar Configuration	Busbar, Insulators, Brackets and Fasteners
Hole Pattern	EE
Mounting Hole Size	11.1 mm
Length	600 mm
Width	50 mm
Thickness	5 mm
Tin Plating	No
Pigtail Included	No
Standard Packaging Quantity	1 pc
UPC	78285687524
EAN-13	3479775450308

Diagrams are representative of the hole pattern. The number of holes is dependent on the length of the grounding busbar.
Additional configurations are available by special order. Note special orders may incur additional lead time.

WARNING
ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

Copyright © 2015 ERICO International Corporation. All rights reserved.
CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.