EH2 Pedestal/Column Cabinet

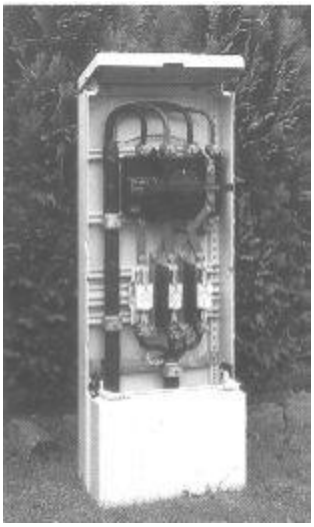

Standards

- IEC 60439-5
- EN 60439-5

Applications

- Power distribution
- Cable TV distribution (CATV)
- Traffic signalling
- Camping sites
- Pump application

Features

- Columns made of hot moulded, glass fibre reinforced polyester.
- Dyed in mass RAL 7035 light gray.
- Protection degree IP44 according to EN 60529, IEC 60529 and BS 5490
- Total insulation
- Protection degree IK10 against external impacts according to EN 50102
- Corrosion resistant.
- UV stabilised for outdoor applications, coated version for improved resistance against UV-corrosion.
- Suitable for use in environments from -35° C to + 125°C. Temporary exceeding temperatures will not be harmful.
- Fully integrated locking clamp, suitable for operation by a half profile cylindrical lock.
- The cylindrical lock can be fitted in a recessed lock box, protected by a vandal proof plastic cap.
- The enclosure can be accessed by removing the frontal lift-off segments (not hinged).
- Fixing holes for threaded inserts M6 are provided in the rear panel allowing direct mounting of busbars, a frame, a mounting plate or components. Inserts to fix the mounting plate are already installed.
- The base and the rear panel of the column are molded as one part.
- The base allows for stable installation of the column.
- For easy access to the inside of the cabinet, the hinged roof offers an opening angle of 90°.
- The rainhood shape prevents water stagnation

on the roof