


Earth Bars (continued)

Earth Bars with Double Disconnecting Links

No. Terminations	L mm	W mm	H mm	Unit Weight kg	Pack Quantity	Part Number
6	570	90	60	3.10	1	EBC 206
8	670			3.70		EBC 208
10	820			4.50		EBC 210
12	920			5.30		EBC 212
14	1020			6.20		EBC 214
16	1120			7.10		EBC 216
18	1270			8.00		EBC 218
20	1420			8.90		EBC 220
22	1470			9.80		EBC 222
24	1570			10.70		EBC 224
26	1720			11.60		EBC 226
28	1820			12.50		EBC 228
30	1885			13.40		EBC 230

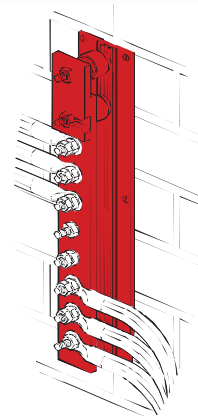

Material:

Bar: 50 x 6mm hard drawn copper bar to BS EN 13601.

Base: Plastic.

Fittings: M10 Hexagon Head Set Screws, Nuts & Washers.

Standard: BS 7430

Disconnecting Link

The disconnecting link provides a temporary break in the earth connection to allow inspection and testing of the earth electrode.

L mm	W mm	H mm	Unit Weight kg	Pack Quantity	Part Number
120	45	45	0.6	1	EBC 100

