

Corrosion prevention tape

for corrosion protection of conductor connections in the soil.

Specification	Width	PU	Ord. no.
Corrosion prevention tape	50 mm	1	1024
as 10 m long rolls	100 mm	1	1025
Corrosion prevention tape	50 mm	1	1068
with protective film (one-sided)	100 mm	1	1069

No need to wear safety gloves

Heat shrink tubing

for corrosion protection of connectors, strips and rods.

Specification	Fit	PU	Ord. no.
Heat shrink tubing (black)	ø 9-16 mm	50 m	102 208
	fl. 30 mm	50 m	102 209

Prönit - Special concrete with high swellability to be used as a compound to improve the earth resistance.

Specification	PU	Ord. no.
Powder in sacks	25 kg	111 446

Screws and accessories

Specification	Material	Dimensions	PU
Cylinder head screw slotted and cross recessed (similar to DIN 84)	Stainless steel V2A	M6x12 mm	100
	Stainless steel V2A	M6x20 mm	100
	Stainless steel V2A/ coppered	M6x12 mm	100
	Stainless steel V2A/ coppered	M6x20 mm	100
DIN 933 Hexagon bolt	Stainless steel V2A	M8x25 mm	100
	Stainless steel V2A	M10x25 mm	100
	Stainless steel V2A/ coppered	M8x25 mm	100
	Stainless steel V2A/ coppered	M10x25 mm	100
DIN 934 Hexagon nut	Stainless steel V2A	M6	100
	Stainless steel V2A	M8	100
	Stainless steel V2A	M10	100
	Stainless steel V2A/ coppered	M6	100
	Stainless steel V2A/ coppered	M8	100
	Stainless steel V2A/ coppered	M10	100
DIN 7504 Drilling screw WS10	Stainless steel V2A-hexagon	6.3x19 mm	100
DIN 7981 Sheet-metal screw	Stainless steel V2A-cross recess	6.3x19 mm	100
DIN 127 B Spring lock washer	Stainless steel V2A	B8	100
	Stainless steel V2A	B10	100
DIN 7996 Halfround-wood screw - cross recessed	Stainless steel V2A	5x60 mm	100
	Stainless steel V2A	5x70 mm	100
Spax-screw with countersunk head cross recessed	Stainless steel V2A	5x60 mm	100
	Stainless steel V2A	5x70 mm	100
Shoulder screw	Steel electrogalvanized	M6 x 50 mm	100
	Steel electrogalvanized	M8 x 50 mm	100
Plastic dowel	Nylon	8x40 mm	500
	Nylon	10x50 mm	500
Plastic dowel with wood screw		8x120 mm	50
DIN 7337 Blind rivet	Stainless steel V2A	5.0x12 mm	500
	Stainless steel V2A/Aluminium	5.0x12 mm	500

Heavy-duty anchor bolts on page 106.


Additional dimensions on request.

Corrosion prevention tape



Ord. no. 1024

Heat shrink tubing




Ord. no. 102 209

Prönit



Ord. no. 111 446

Screws and accessories

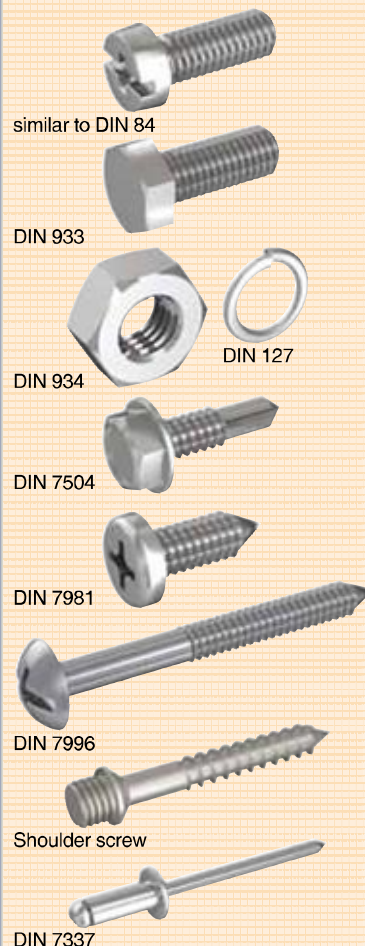

similar to DIN 84

DIN 933

DIN 934

DIN 127

DIN 7504

DIN 7981

DIN 7996

Shoulder screw

DIN 7337