


TCB Threaded Busbar With Fixing Slot



- End slots can be used to fix busbar to a support or connect the main input conductor
- Heavy-duty power connection
- Circuit breaker, generator and prefabricated power network conductor
- Alternative to large and multiple cables
- Earth/ground connection
- Power distribution
- Rounded edges

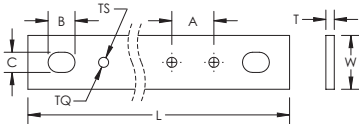

Material: Copper

Part Number	Article Number	Width W	Thickness T	Length L	Thread Size TS	Torque TQ	A	B	C	Unit Weight
TCB15X5-1M	550210	15 mm	5 mm	990 mm	M6	6 N-m	25.0 mm	12 mm	8 mm	0.65 kg
TCBS15X5-2M	549000	15 mm	5 mm	1,985 mm	M6	6 N-m	17.5 mm	12 mm	8 mm	1.19 kg
TCB20X5-1M	550220	20 mm	5 mm	990 mm	M6	6 N-m	25.0 mm	14 mm	10 mm	0.85 kg
TCB20X5-2M	549010	20 mm	5 mm	1,985 mm	M6	6 N-m	25.0 mm	14 mm	10 mm	1.67 kg
TCB30X5-2M	549020	30 mm	5 mm	1,985 mm	M6	6 N-m	25.0 mm	16 mm	12 mm	2.50 kg
TCB32X5-1M	550230	32 mm	5 mm	990 mm	M6	6 N-m	25.0 mm	16 mm	12 mm	1.35 kg

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2021 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.