



PPS Presswelded Power Shunt – PPS100X15-110 (566070)



- Press welded laminations are welded to each other through direct current applied to pieces under pressure
- Press welding forms a solid palm with the properties of a plain bar
- Smaller cross section for same capacity
- Runs cooler than equal section

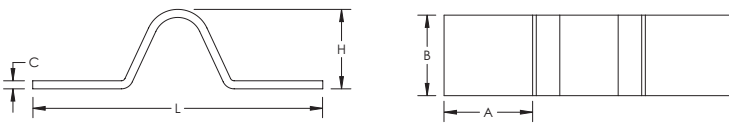

Part Number	PPS100X15-110
Article Number	566070
Material	Copper
Finish	Plain
Lamination Thickness	0.3 mm
Cross Section	1,500 mm ²
ΔT 30 K	2,178 A
ΔT 50 K	2,886 A
Length (L)	360 mm
Height (H)	57 mm
A	110 mm
B	100 mm
C	15 mm
Unit Weight	5.385 kg
2 Bar Current Coefficient	1.6
Certifications	EAC 7413000009 (Russian Federation) RoHS
Standard Packaging Quantity	1 pc
UPC	78285687845
EAN-13	3479775660707

When used in parallel, the two shunts must be spaced with a minimum distance equal to the thickness of the shunt to allow air cooling.



WARNING

ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

Copyright © 2015 ERICO International Corporation. All rights reserved.

CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

